
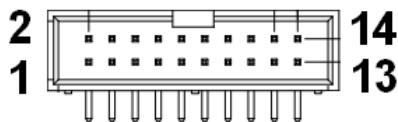


14 PIN BUTTERFLY LASER BREAKOUT BOARD

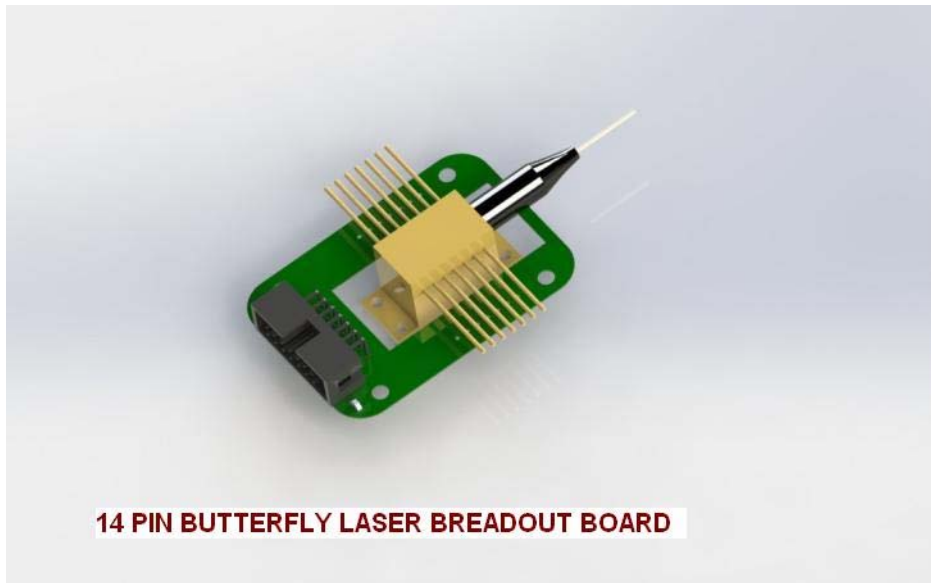

14 PIN CONNECTOR PINOUT (mating with standard 14 pin IDC cable)

1/3: Laser Diode +	2/4: Laser Diode -	5: Photo Diode -	6: Photo Diode +
7/8: Thermistor	9/10: GND	11/13: TEC -	12/14: TEC +


Current Rating Per Pin with Cable (not shown): 3A Derating Recommended

Board Thickness 1.6mm OR Customer Defined

GND Test Point Loop

Operating Temperature: -40 – 60C

(unit: mm)

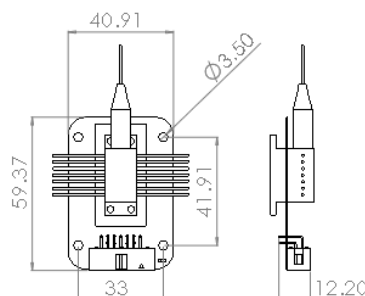

To Send Quotation:

Email: smartsensinginternational@gmail.com

Telephone: 978-494-0802